

K7GTP10FF

GAS SOLID TOP + GAS OVEN 2/1 GN



PRODUCT DESCRIPTION

Stainless steel frame. Double-skinned moulded oven door and heavy-duty handle. Athermic thermoset plastic knobs.

Thick cast iron cooking surface with rounded edges made in single casting. Lift-off central round insert.

Central stainless steel round burner, suitable for working at high temperatures.

Maximum temperature of about 500°C in the hottest central point, gently decreasing towards the edges thanks to different isothermal temperature zones.

Gas oven 2/1 GN. Oven stainless steel removable grill. Oven floor made of a thick steel sheet strengthened by a series of ribs.

Insulation of the cooking chamber and of the oven door ensured by a layer of high temperature resistant ceramic fibre.

Quick temperature rise and heat retention obtained through a stabilized flame burner with high performance integrated diffuser, suitable to work at high temperatures.

The oven burner is equipped with a thermostatic gas valve which allows to adjust the temperature up to 300°C. Safety ensured by a thermocouple kept active by the burner flame.

Height-adjustable stainless steel legs.

Tested with natural gas or LPG, according to the user's needs.

Accessories available **on demand**.



TECHNICAL SPECIFICATIONS

Width: 800 mm
Depth: 700 mm
Height: 850 mm
Weight: 169 kg
Volume: 0.80 m³
Electrical power: 19.05 kW




K7GTP10FF

TUTTAPIASTRA A GAS + FORNO A GAS 2/1 GN - PLAQUE COUP DE FEU À GAZ + FOUR À GAZ 2/1 GN - GAS SOLID TOP + GAS OVEN 2/1 GN - GAS-GLÜHPLATTENHERD + GASBACKOFEN 2/1 GN - COCINA DE PLACA RADIANTE A GAS + HORNO A GAS 2/1 GN - ГАЗОВАЯ КЕРАММУЕСКАЯ ПЛМТА + ГАЗОВАЯ ДУХОВКА 2/1 GN

DATI TECNICI / CARACTERISTIQUES TECHNIQUES / TECHNICAL SPECIFICATIONS / TECHNISCHE DATEN / CARACTERISTICAS TECNICAS / ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ

Dimensioni / Dimensions / Dimensions / Maße / Medidas / Размеры	[мм]	800x700x850
Gas / Gaz / Gas / Gas / Газ (B)	[Kw] - [кВт]	19
Tipo / Type / Type / Typ / Тип (A)		A1
GPL/LPG / Сжиженный нефтяной газ (G30) (D)	[Kg/h] [кг/ч]	1,502
Metano / Methane / Natural gas / Erdgas / Метан (G20) (C)	[m3/h] [м3/ч]	2,015
Aria / Air / Luft / Aire / Воздух	[m3/h] [м3/ч]	38
Racc. Gas / Racc. Gaz / Gas fitting / Gasanschluss / Empalme gas / Газовое соединение		UNI-ISO 7/1 R ½
Bruciatore / Bruleur / Burner / Brenner/Quegador / Горелка	[kW] [кВт]	1 x 11,5
Forno / Four / Oven / Ofen / Horno / Духовка 2/1 GN (G)	[kW] [кВт]	1 x 7,5

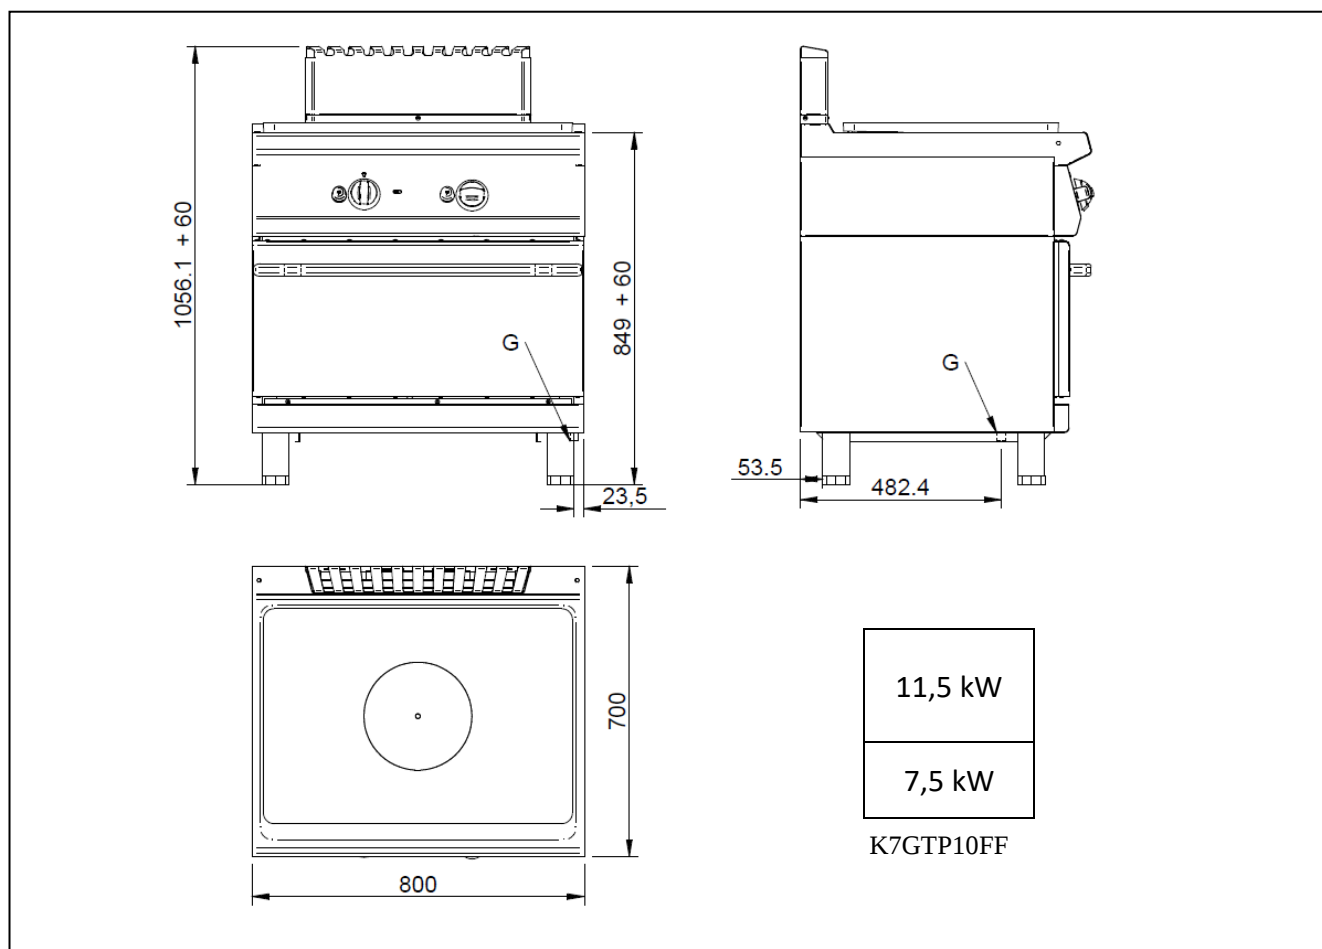

G = Gas / Gaz / Gas / Gas / газ

Optional

n.1 x **K7A25019** Applicazione suola in ghisa - Sole en fonte - Built-in cast iron bottom - Sohle aus Gusseisen - Opción base en fierro fundido - Дополнение подложка из чугуна для плиты