

K7GTP10VV

GAS SOLID TOP + OPEN CABINET



PRODUCT DESCRIPTION

Stainless steel frame. Athermic thermoset plastic knobs.

Thick cast iron cooking surface with rounded edges made in single casting. Lift-off central round insert.

Central stainless steel round burner, suitable for working at high temperatures.

Maximum temperature of about 500°C in the hottest central point, gently decreasing towards the edges thanks to different isothermal temperature zones.

Height-adjustable stainless steel legs.

Tested with natural gas or LPG, according to the user's needs.

Accessories available **on demand**.



TECHNICAL SPECIFICATIONS

Width: 800 mm
Depth: 700 mm
Height: 850 mm
Weight: 109 kg
Volume: 0.80 m³
Gas power: 11.50 kW




K7GTP10VV

TUTTAPIASTRA A GAS + VANO APERTO - PLAQUE COUP DE FEU À GAZ + BAIE LIBRE OUVERTE - GAS SOLID TOP + OPEN CABINET - GAS-GLÜHPLATTENHERD + OFFENER UNTERSCHRANK - - COCINA DE PLACA RADIANTE A GAS + BASE ABIERTA - ГАЗОВАЯ КЕРАММУЕСКАЯ ПЛМТА + ОТКРЫТЫЙ ШКАФ

DATI TECNICI / CARACTERISTIQUES TECHNIQUES / TECHNICAL SPECIFICATIONS / TECHNISCHE DATEN / CARACTERISTICAS TECNICAS / ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ

Dimensioni / Dimensions / Dimensions / Maße / Medidas / Размеры	[мм]	800x700x850
Gas / Gaz / Gas / Gas / Газ (B)	[Kw] - [кВт]	11,5
Tipo / Type / Type / Typ / Тип (A)		A1
GPL/LPG / Сжиженный нефтяной газ (G30) (D)	[Kg/h] [кг/ч]	0,907
Metano / Methane / Natural gas / Erdgas / Метан (G20) (C)	[m3/h] [м3/ч]	1,216
Aria / Air / Luft / Aire / Воздух	[m3/h] [м3/ч]	23
Racc. Gas / Racc. Gaz / Gas fitting / Gasanschluss / Empalme gas / Газовое соединение		UNI-ISO 7/1 R ½
Bruciatore / Bruleur / Burner / Brenner/Quemador / Горелка (C)	[kW] [кВт]	1 x 11,5

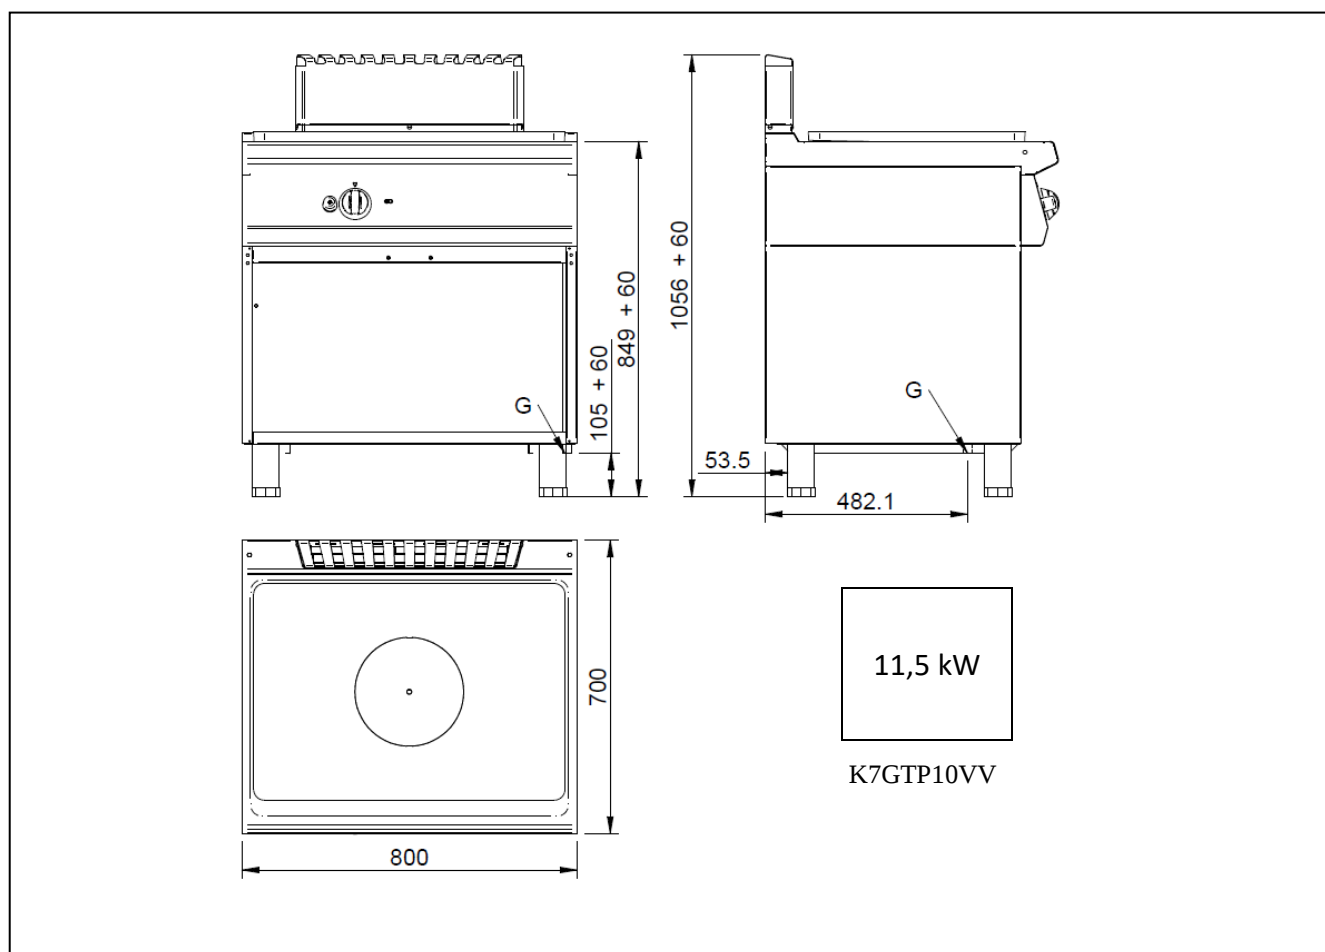

G = Gas / Gaz / Gas / Gas / Gas / газ

Optional

n. 2 x **K7PORTA** Porta - Porte - Door - Tür - Puerta – Дверца